


Tideway®

Diaphragm Pump (series DP)

Main Usage :

- ☞ The pump can suck the peanut, pickles, tomato slurry, red sausage, chocolate, hops and syrup etc.
- ☞ The pump can suck the paint, pigment, glue, and adhesive etc.
- ☞ The pump can suck various glazed slurries of tile, porcelain, brick and chinaware etc.
- ☞ The pump can suck various grinding materials, corrosive agent and clean the oil dirt etc.
- ☞ The pump can suck various toxin and flammable or volatility liquid etc.
- ☞ The pump can suck various wedge water, cement slurry and mortar etc.
- ☞ The pump can suck various strong acid, alkali and corrosive liquid etc.
- ☞ It can be used as a front-step transmission device of the solid and liquid separation equipment.

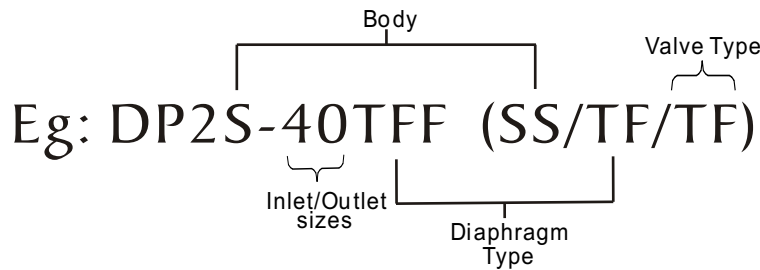

Stock Code:	Model	Material
881218006	DP2C-80B(3")	(CI/BU/BU)
881218012	DP2S-50TFF(2")	(SS/TF/TF)
881218014	DP2A-15TFF(½")	(AL/TF/SS)
881218018	DP2P-25TFF(1")	(PP/TF/TF)
881218021	DP2S-40TFF(1-½")	(SS/TF/TF)
881218022	DP2A-40B(1-½")	(AL/BU/BU)



DP2A-25B



DP2S-40TFF



DP2P-25TFF

Model	Discharge (m ³ /h)	Head (m)	Delivery pressure (kgf/cm ²)	Sucked lift (m)	Max grain Diameter (mm)	Max pressure (kgf/cm ²)	Max air consumption (m ³ /min)
DP2-15	1	50	6	5	1	7	0.3
DP2-25	2.4	50	6	7	2.5	7	0.6
DP2-40	8	50	6	7	4.5	7	0.6
DP2-50	12	50	6	7	8	7	0.9
DP2-80	24	50	6	7	10	7	1.5

***Product's specification may subject to change without further notice.
 ***Actual product may slightly differ from pictures shown.

ESM286-DP
 (09/02/15)