

Tideway

PNEUMATIC DIAPHRAGM PUMP

(GMB-40 1-1/2")




Aluminum




Polypropylene

Air Consumption (m³/h)

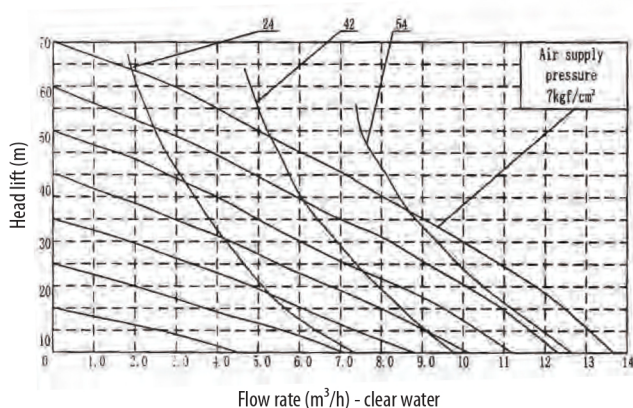

Installation Dimension

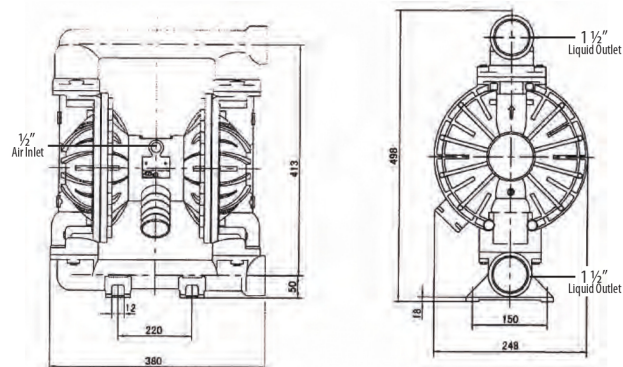

Technical Parameters

Max. Flow Rate		0 - 12.5 m ³ /h	
Max. Lift head		0 - 70 m	
Outlet pressure		0 - 6 kgf/cm ²	
Suction lift		0 - 5 m	
Allowable diameter of grains passing		0 - 4.5 mm	
Air supply pressure		0 - 7 kgf/cm ²	
Air consumption		0 - 600 L/min	
Air Inlet		½ inch	
Air Outlet		¾ inch	
Net weight		Polypropylene - 12 kg	
		Aluminum - 20 kg	
		Stainless Steel - 30 kg	
Gross weight		Carton packaging, plus : 1.8 kg	
881218020A - GMB2P-40TFF	881218021A - GMB2S-40TFF	881218022A - GMB2A-40B	881218023A - GMB2A-40TFF

*** Product's specification subject to change without further notice.

*** Actual product may slightly differ from pictures shown.

ESM411 - GMB40
(16/12/19)