


Tideway

PNEUMATIC DIAPHRAGM PUMP

(GMB-50 2")



Aluminum

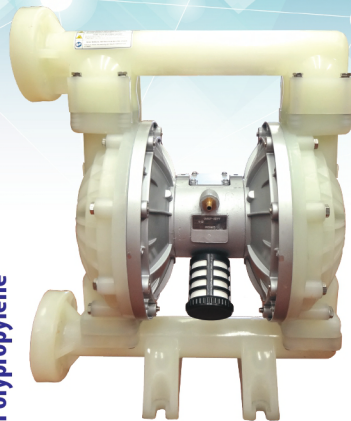


Polypropylene




Stainless Steel

Air Consumption (m³/h)

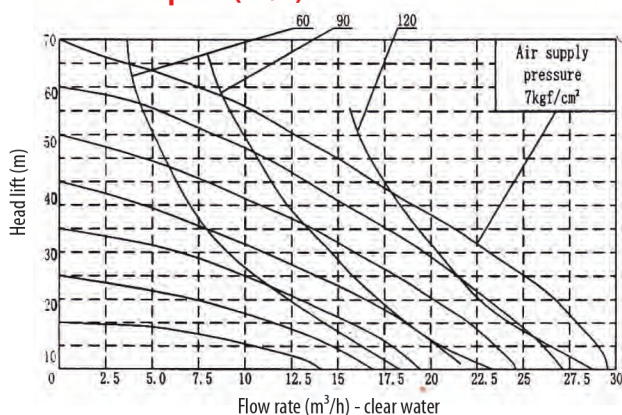

Installation Dimension

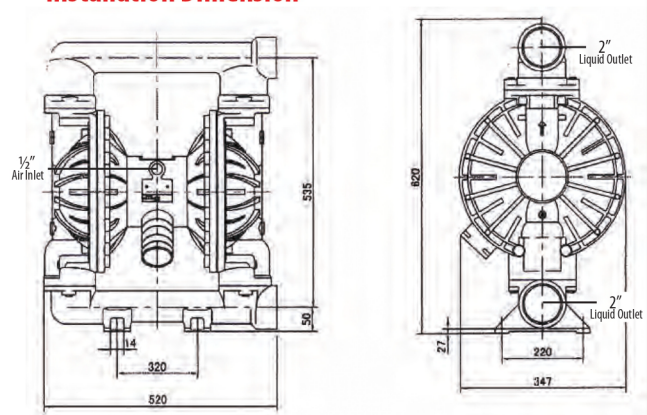

Technical Parameters

Max. Flow Rate		0 - 22 m³/h	
Max. Lift head		0 - 70 m	
Outlet pressure		0 - 6 kgf/cm2	
Suction lift		0 - 5 m	
Allowable diameter of grains passing		0 - 8 mm	
Air supply pressure		0 - 7 kgf/cm²	
Air consumption		0 - 900 L/min	
Air Inlet		½ inch	
Air Outlet		¾ inch	
Net weight		Polypropylene - 24 kg	
		Aluminum - 54 kg	
		Stainless Steel - 75 kg	
Gross weight		Carton packaging, plus : 18 kg	
881218012A - GMB2S-50TFF	881218024A - GMB2A-50TFF	881218025A - GMB2A-50B	881218028A - GMB2P-50TFF

*** Product's specification subject to change without further notice.

*** Actual product may slightly differ from pictures shown.

ESM411 - GMB50
(16/12/19)